

TECHNICAL FILE

T1.321TE.CQ

WALL MOUNTED THERMOSTATIC BATHTUB MIXER WITH 2 EXITS

TECHNICAL FEATURES


- STOP AT 330º
- TEMPERATURE RANGE FROM MIN. 5º TO MÁX. 70º
- RECOMMENDED TEMPERATURE 50º
- PRESSURE RANGE 0.1 TO 5 BAR
- RECOMMENDED PRESSURE 1 TO 5 BAR

FLOW CHART

AT:

1 BAR - 13.9 LT/MIN. 1.5 BAR - 18 LT/MIN. 2 BAR - 21 LT/MIN. 3 BAR - 24 LT/MIN. 4 BAR - 28 LT/MIN.


TECHNICAL DRAWING (MEASUREMENTS IN MM)

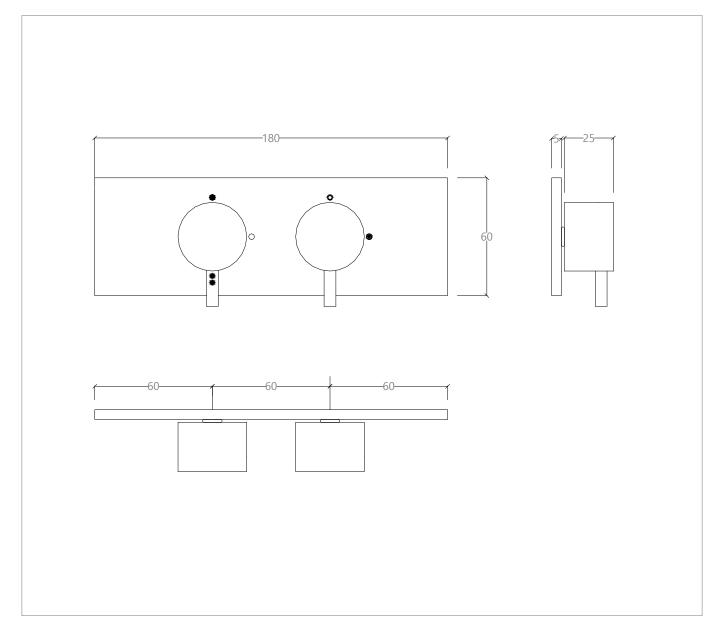



TECHNICAL FILE T1.321TE.CQ

ASSEMBLY INSTRUCTIONS

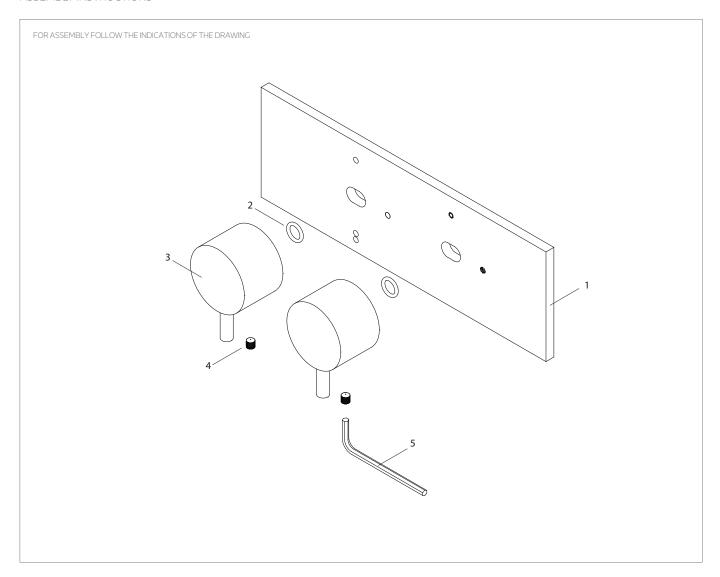

TECHNICAL DATA			LEGEND		INSTALLATION RECOMENDATIONS
Nº	REFERENCE	DESCRIPTION	SYMBOL	SYMBOL	BEFORE INSTALLING A TAP, IT IS GOOD TO RINSE THE SUPPLY PIPES TO REMOVE ALL RESIDUES. WE ALSO RECOMMEND INSTALLING THE TAPS WITH A FILETER THE INSTALLATION OF THE TAP MUST BE DONE WITH THE SURFACE CLEAN AND DRY. TO PERFORM THE WATER PRESSURE TEST, THE TAPS MUST BE OPEN.
01	P00000	PLATE	0	CLOSED	
02	P00000	O-RING	•	EXIT 1	
03	P00000	FLOW HANDLE	•	EXIT 2	
04	P00000	ALLEN SCREW	•••	EXIT 3	CLEANING AND MAINTENANCE CLEANING MUST BE DONE WITH LIQUID SOAP AND WATER. DO NOT USE LIQUID DETERGENTS CONTAINING ABRASIVE OR ACIDIC SUBSTANCES, ABRASIVE SPONGES OR DISINFECTANTS. INCORRECT CLEANING MAY PERMANENTLY RUIN THE SURFACE OF TAPS. IN COLOR FINISHINGS, DO NOT USE PRODUCTS CONTAINING ALCOHOL, ACETONE AND OTHER SOLVENTS.
05	P00000	ALLEN KEY	o	НОТ	
			*	COLD	

